


Q.HOME⁺ ESS HYB-G1

MODULAR ENERGY STORAGE SOLUTION
FOR NORTH AMERICA



**HYBRID
INVERTER**

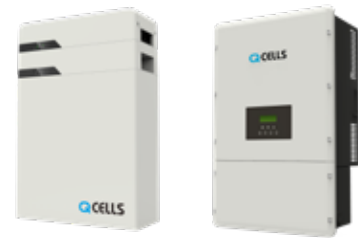

**BATTERY
CHARGER**



**LITHIUM-ION
BATTERY**



**10 YEAR PRODUCT
WARRANTY**



SCALABLE SOLUTION FOR OPTIMIZED CONSUMPTION

Scalable storage capacity from 4.5kWh up to 18.9kWh to suit all consumption cases.



SMART DESIGN

Modular design for easy and fast installation, remote control operated hybrid system with PV inverter, lithium-ion battery, and battery charger.



REMOTE MONITORING

Easy maintenance due to its early error detection function, web and mobile monitoring, and a reliable service network.



SAFETY AND RELIABILITY

Premium quality lithium-ion.



DURABILITY

High durability with 10 year product warranty and 90% depth of discharge (DoD).



100% BACKUP POWER FUNCTION

Thanks to the integrated backup power function, even in the event of power failure 100% of the rated inverter output will support critical loads.

THE IDEAL SOLUTION FOR:



Rooftop arrays on
residential buildings

TECHNICAL SPECIFICATIONS

GENERAL PRODUCT INFORMATION		Q.HOME® ESS HYB-G1			
		6.0kW	7.0kW	7.6kW	8.6kW
Dimensions inverter / storage (L × W × D)	[in]	36 × 22 × 10.9 (91.3 × 56.0 × 27.6mm) / 18.3 × 7.6 × 23.1in (464 × 193 × 588mm)			
Weight inverter / storage (4.5kWh) / storage (6.3kWh)	[lbs]	130 (58.9kg) / 124.8 (56.6kg) / 148.4 (67.5kg)			
Operating temperature inverter / storage	[°F]	-4 ~ 140 (-20 ~ 60 °C) / 32 ~ 113 (0 ~ 45 °C)			
Relative humidity	[%]	0-100			
Enclosure rating		Type 4X			
Mounting		Wall mounted			
Max. operating height without power loss	[m]	2000			
Cooling method		Natural			
Noise emissions	[dB]	≤ 35			
AC over voltage category		I/IV			
Front panel display		LCD			
Communications		RS485 / LAN / CAN 2.0 / WiFi / 4G (optional)			
Remote monitoring		Web, mobile			
Software update		Local USB / Remote Web			
Energy management system		Integrated			
PV DATA (DC)					
Max. input power	[kW]	7.2	10.5	10.64	13.76
Max. input voltage [V _{DC}]	[V]	500			
Start input voltage / MPPT operating range / Rated input voltage	[V]	150 / 105-500 / 360			
Shutdown voltage	[V]	80			
Number of independent MPPTs		2	3	3	4
Maximum DC power per MPPT	[kW]	3.6			
Max. input current per MPPT / Max. short circuit current per MPPT	[A]	10 / 12.5			
GRID DATA (AC)					
Max. output power / Rated output power	[kVA]	6.6 / 6	7.7 / 7	8.36 / 7.6	9.46 / 8.6
Nominal voltage / Range	[V]	120 / 240 split phase (105.5 / 211 ~ 132 / 264)			
Nominal grid frequency / Range	[Hz]	60 / 59.3 ~ 60.5			
Nominal current	[A]	25	29	32	36
Maximum AC output current protection	[A]	28	32	35	41
Power factor		> 99 (adj. ±0.8)			
Total harmonic distortion	[%]	≤ 3			
BACKUP POWER OUTPUT (AC)					
Max. output power / Rated output power	[kW]	6.6 / 6	7.7 / 7	8.3 / 7.5	8.3 / 7.5
Max. output current / Rated output current	[A]	28 / 25	32 / 29	35 / 32	35 / 32
Rated voltage	[V]	120 / 240 split phase			
Rated frequency	[Hz]	60			
Switchover time to backup power		< 200ms			
Support by PV during backup power operation		YES			
EFFICIENCY					
Max. efficiency (PV-AC) / CEC efficiency	[%]	96.7 / 95.67			
Max. efficiency (PV-Battery) / (Battery-AC)	[%]	98.24 / 96.46			
BATTERY DATA (DC)					
Battery technology		Lithium-ion (NMC)			
Battery usable capacity per module	[kWh]	4.5 / 6.3			
Scalability		Up to three battery modules			
Max. battery usable capacity	[kWh]	13.5 / 18.9			
Rated power / Max. power (with three battery modules)	[kW]	7.5 / 8.3			
Rated battery voltage / Battery voltage range (per module)	[Vdc]	100.8 / 85 ~ 118			
Battery management system voltage range	[Vdc]	84 - 432			
Rated discharging current	[A]	25			
Depth of discharge (DoD)	[%]	90			
COUNTRY AVAILABILITY / CERTIFICATES AND WARRANTY					
Inverter certificates		UL 1741, UL 1741.SA, UL 9540, IEEE 1547, IEEE 1547.1, CSA – C 22.2N.1071-01, UL 1998, UL 1699B, FCC part 15 Class B			
Battery certificates		UL 1642, UL 1973, UL 9540, CE, RCM, TUV (IEC 62619), UN 3480, Class 9, UN 38.3			
Product warranty / Performance warranty		10 years			

NOTE: Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Hanwha Q CELLS America Inc.

400 Spectrum Center Drive, Suite 1400, Irvine, CA 92618, USA | [TEL +1 949 748 59 96](tel:+19497485996) | [EMAIL inquiry@us.q-cells.com](mailto:inquiry@us.q-cells.com) | [WEB www.q-cells.us](http://www.q-cells.us)

