



# Series 7 *TR1*.

## 525-550 Watt Thin Film Solar Module



Series 7 *TR1* thin film solar modules combine First Solar's thin film technology with an optimized structural design to deliver improved efficiency, enhanced installation velocity, and unmatched energy performance.



### More Energy per Nameplate Watt

- With superior temperature coefficient, spectral response and shading behavior, Series 7 *TR1* modules generate up to 8% more energy per watt than conventional crystalline silicon solar modules
- Unlike crystalline silicon modules, First Solar's thin film technology does not experience the losses associated with LID and LeTID
- Anti-reflective coated glass enhances energy production



### Unmatched Quality and Reliability

- End-to-end manufacturing process for globally consistent quality
- Tested and certified to IEC standards and beyond
- Durable glass/glass construction
- Immune to and warranted against power loss from cell cracking
- 30-year Linear Performance Warranty
- 12-year Limited Product Warranty



### Optimized Module Design

- Optimized back rail mount design enhances installation velocity
- Frameless design improves soiling and snow shedding
- Dual junction box design reduces wire management complexity and cost



### Industry's Most Eco-efficient PV Solution

- Industry leading carbon footprint, water footprint and energy payback time
- Globally available PV module recycling services



### America's Solar Company

- Designed, responsibly sourced, and manufactured in the USA

**19.7%**  
HIGH BIN EFFICIENCY


**30YR**  
LINEAR PERFORMANCE  
WARRANTY

**98%**  
WARRANTY START POINT

**0.6%**  
WARRANTED ANNUAL  
DEGRADATION RATE



Learn more about First Solar and Series 7 *TR1* at [firstsolar.com/S7](https://firstsolar.com/S7)

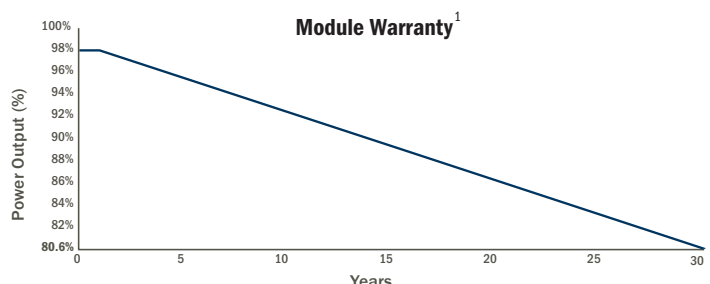

# Series 7 TR1.

## Electrical Specifications



LEADING THE WORLD'S  
SUSTAINABLE ENERGY FUTURE

**MODEL TYPES: FS-7XXXA-TR1** (XXX = NOMINAL POWER)  
**RATINGS AT STANDARD TEST CONDITIONS** (1000W/m<sup>2</sup>, AM 1.5, 25°C)<sup>2</sup>

Nominal Power <sup>3</sup> (-0/+5%)	P <sub>MAX</sub> (W)	525	530	535	540	545	550
Efficiency (%)	%	18.8	19.0	19.1	19.3	19.5	19.7
Cell Efficiency (%)	%	19.7	19.9	20.1	20.3	20.4	20.6
Voltage at P <sub>MAX</sub>	V <sub>MAX</sub> (V)	186.0	186.9	187.8	188.7	189.6	190.4
Current at P <sub>MAX</sub>	I <sub>MAX</sub> (A)	2.82	2.84	2.85	2.86	2.88	2.89
Open Circuit Voltage	V <sub>OC</sub> (V)	226.1	226.7	227.2	227.7	228.2	228.8
Short Circuit Current	I <sub>SC</sub> (A)	3.04	3.05	3.06	3.06	3.07	3.08
Maximum System Voltage	V <sub>SYS</sub> (V)	1500 <sup>5</sup>					
Limiting Reverse Current	I <sub>R</sub> (A)	5.0					
Maximum Series Fuse	I <sub>CF</sub> (A)	5.0					

### TEMPERATURE CHARACTERISTICS

Module Operating Temperature Range	(°C)	-40 to +85
Temperature Coefficient of P <sub>MAX</sub>	T <sub>K</sub> (P <sub>MAX</sub> )	-0.32%/°C [Temperature Range: 25°C to 75°C]
Temperature Coefficient of V <sub>OC</sub>	T <sub>K</sub> (V <sub>OC</sub> )	-0.28%/°C
Temperature Coefficient of I <sub>SC</sub>	T <sub>K</sub> (I <sub>SC</sub> )	+0.04%/°C
Nominal Operating Cell Temperature	(°C)	43


### PACKAGING INFORMATION

Model Type	Modules Per Pack	Packs per 53' Container
FS-7XXXA-TR1	44	Up to 10

### MECHANICAL DESCRIPTION

Length	2300mm
Width	1216mm
Area	2.80m <sup>2</sup>
Module Weight	39.7kg
Leadwire <sup>6</sup>	2.5mm <sup>2</sup> , 650mm (+) & Bulkhead (-)
Connectors	TE Connectivity PV4-S or alternate
Junction Box	IP68 Rated
Bypass Diode	N/A
Cell Type	Thin film CdTe semiconductor, up to 268 cells
Back Rail Material	Galvanized steel
Front Glass	Heat strengthened
Back Glass	Heat strengthened
Encapsulation	Laminate material with edge seal
Frame to Glass Adhesive	Silicone
Load Rating	2400Pa

### Mechanical Specifications

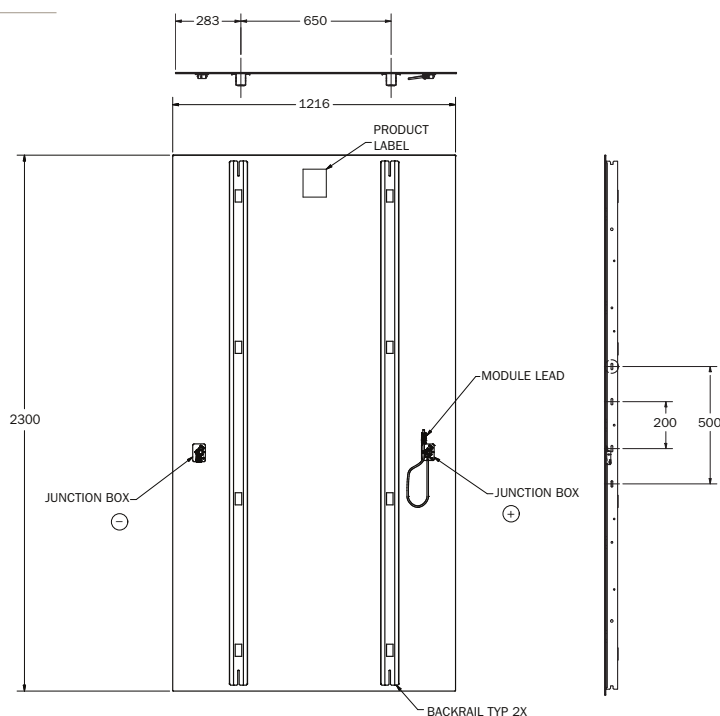

## Certifications & Tests<sup>4</sup>

### CERTIFICATIONS AND LISTINGS

IEC 61215:2021 & 61730-1:2016<sup>5</sup>, CE  
IEC 61701 Salt Mist Corrosion  
IEC 60068-2-68 Dust and Sand Resistance  
IEC 62716 Ammonia Corrosion  
UL 61730 1500V Listed

### EXTENDED DURABILITY TESTS

IEC TS 63209-1 Extended Stress Test  
Long-Term Sequential  
Thresher Test  
PID Resistant

### QUALITY & EHS

ISO 9001:2015  
ISO 14001:2015  
ISO 45001:2018  
ISO 14064-3:2006  
EPEAT Silver Registered

Install in portrait only

- Limited power output and product warranties subject to warranty terms and conditions
- All ratings ±10%, unless specified otherwise. Specifications are subject to change
- Measurement uncertainty applies
- Testing Certifications/Listings pending
- IEC 61730-1: 2016 Class II
- Leadwire length from junction box exit to connector mating surface



#### Disclaimer

All images shown are provided for illustrative purposes only and may not be an exact representation of the product. First Solar, Inc. reserves the right to change product images at any time without notice. The information included in this Module Datasheet is subject to change without notice and is provided for informational purposes only. No contractual rights are established or should be inferred because of user's reliance on the information contained in this Module Datasheet. Please refer to the appropriate Module User Guide and Module Product Specification document for more detailed technical information regarding module performance, installation and use.

First Solar, the First Solar logo, and Leading the World's Sustainable Energy Future are trademarks of First Solar, Inc., registered in the U.S. and other countries. Series 7 and Series 7 TR1 are trademarks of First Solar, Inc.