


Accessories

» Solis Data Logging Stick

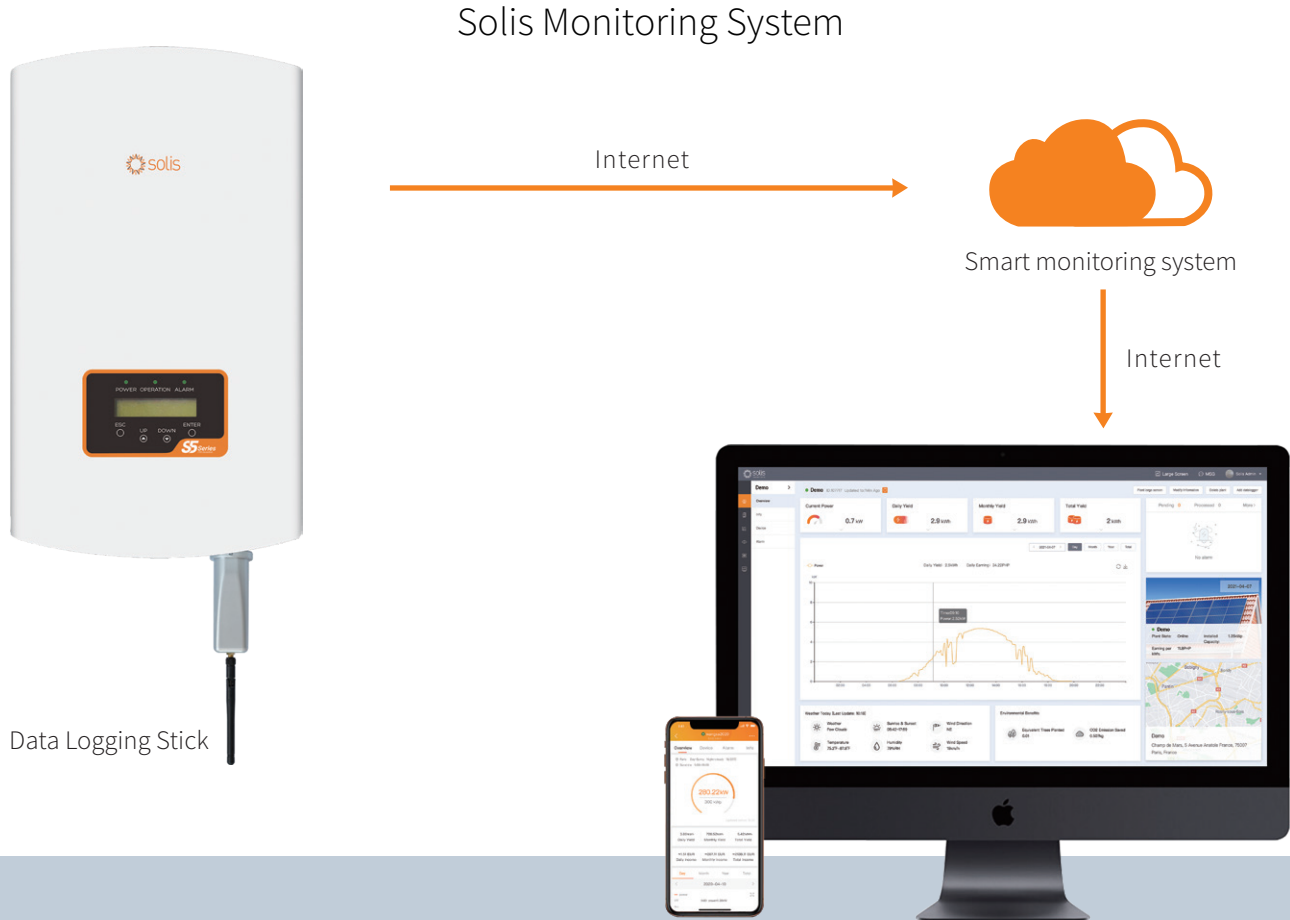

Data Logging Stick: Wi-Fi

- Quick installation and easy operation enabling local and remote monitoring
- Mobile APP installation for Android and IOS
- Flexible outdoor rated Wi-Fi connection

Data Logging Stick: GPRS

- Quick installation and easy operation
- Connecting inverters with 'plug and play' function
- Easy visualization of data and other information via mobile device
- GPRS communication enabling mobile monitoring anytime anywhere

Datasheet

Model Name	DLS-W(Wi-Fi)	DLS-G(GPRS)
Max. number of inverters	1	
Inverter communication	4pin	
Remote communication	Wi-Fi (802.11 b/g/n)	GPRS Class 12
Communication rate	9600 bps (adjustable:1200-57600 bps)	
Frequency	2.412 GHz-2.484 GHz	850/900/1800/1900 MHz
External antenna	I-PEX antenna	I-PEX antenna
Data collection intervals	5 minutes (adjustable: 1-20 minutes)	
Data interface	RS485	
Data storage	8MBYTE FLASH	

Electrical

Input voltage	DC 5V	DC 5V (+/-5%)
Working current	200-300 mA	160-500 mA

Environmental

Operating temperature	-10 ~ +85°C	
Operating humidity	10%-90% Relative humidity, no condensa	
Storage temperature	-40 ~ +125°C	
Storage humidity	<40%	
Protection class	IP65	IP65

General Data

Dimensions (L*W*H)	118*43*43 mm	118*43*43 mm
Weight	56 g	

Other

Certificates	FCC, CE	
--------------	---------	--